


MIDLAND CT590 S

ENTRY LEVEL

NEW

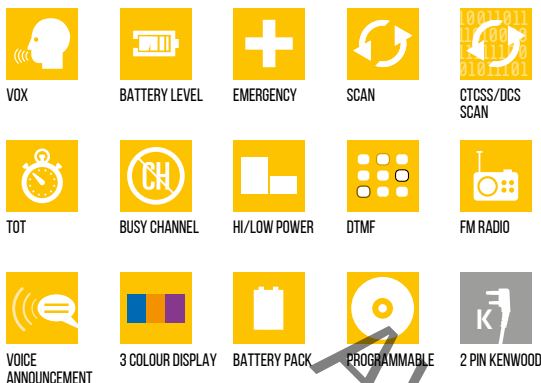

Avionic sale and customer service
Two-way radio and telecommunication technology



AVIONIC SERVICE GmbH / Srl
L.-Galvani-Str. 6/E Via L. Galvani | I-39100 Bozen / Bolzano
Tel. +39 0471 506 963 | Fax +39 0471 921 418
info@avionic-service.eu | avionic@pec.it | www.avionic-service.eu

AMATEUR VHF/UHF

Version: VHF/UHF
Colour: Black
Frequency: 144-146MHz
(Exp. 136-174MHz)
430-440MHz
(Exp. 400-480MHz)
Output power: 5W VHF/UHF

FEATURES

- 50 tones CTCSS and 208 codes DCS
- 128 channels can be stored
- 1750Hz tone for repeater bridges
- Emergency SOS function
- Channel and dual band VHF/UHF displayed
- Operation mode: UHF/VHF, UHF/UHF, VHF/VHF
- Output power: 5W UHF/VHF
- 3-colour LCD display with selectable backlight

- FM radio receiver (87.5-108MHz)
- Scan, Dual Watch
- Channel Spacing: 25KHz/12.5KHz
- VOX adjustable on 10 levels
- Channel or frequency mode selection
- TOT (Time Out Timer)
- DTMF Function
- Reverse function
- Emergency alarm function
- Setting up and storing channel names
- CTCSS and DCS code search function
- PTT-ID
- BCLLO (Busy Channel Lockout function): busy channel lock function
- High/low power selection
- Frequency step: 2.5/5/6.25/10/12.5/25KHz
- Adjustable frequency offsets: 0-69.990MHz
- Adjustable Offset Direction

- Squelch adjustable on 9 levels
- Voice announcement of the selected function
- Keypad lock
- Power Save (battery economy)
- Programmable from PC
- Li-Ion 1500 mAh battery pack
- 2-pin Kenwood Accessory socket

PACKAGING AND CODES

Radio, 1500 mAh 7.4V Li-Ion battery pack, desktop fast charger, wall adapter, antenna, belt clip
code C1354

PROGRAMMING SOFTWARE PRG10 - C974.01

Complete with USB connection cable for PC.