


MIDLAND CT 990

POWER NEVER SEEN BEFORE

NEW

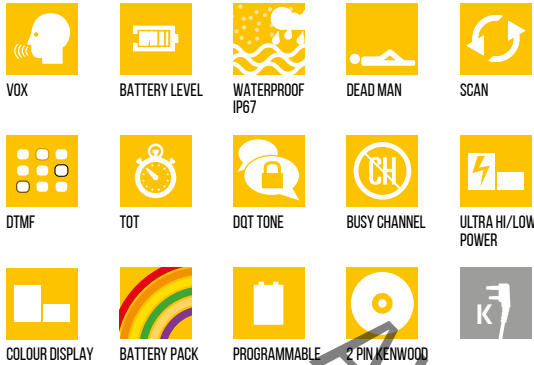

Avionic sale and customer service
Two-way radio and telecommunication technology



AVIONIC SERVICE GmbH / Srl
L.-Galvani-Str. 6/E Via L. Galvani | I-39100 Bozen / Bolzano
Tel. +39 0471 506 963 | Fax +39 0471 921 418
info@avionic-service.eu | avionic@pec.it | www.avionic-service.eu

10W ULTRA POWER TRANSMISSION

SUPPLIED WITH 2 ANTENNAS

- **Long antenna:** enhances the radio performance in TX/RX
- **Short antenna:** allows better handling

CT990 is fitted with the Dead Man function, useful when you are on your own or isolated. This function constantly monitors the status of the person wearing the radio: if a change in position of the radio from vertical to horizontal (due to illness or injury) is recorded **CT990** emits an alarm that is sent to all users tuned to its frequency.

Version: Dual Band VHF/UHF
Colour: Black
Frequency: 144-146MHz
(Export 136-174MHz)
430-440MHz
(Export 400-470MHz)
Output power: 10W VHF/UHF

FEATURES

- 257 memory channels
- 83 + 83 DCS codes and 38 CTCSS tones
- Selectable channel spacing 25kHz/12.5 kHz
- Dual band VHF/UHF displayed
- Frequency band (settable according to

- country/area of use): 144-146 MHz & 430-440MHz (Rx/Tx).
- Operating mode: UHF/VHF, VHF/VHF or UHF/UHF
- Selectable channel step 25kHz/12.5 kHz
- IP67 certificate
- Dead Man function
- **DQT function (private conversation)**
- Wide colour LCD display
- Activation tones for repeater bridges
- Individual/group selective calls
- Side tone: end of transmission tone silencer
- VOX function
- Voice indication of the selected function "VOICE"
- Optional display of the channel number, channel number and frequency, channel name
- Inverted frequency function
- Scan function
- FM radio receiver
- Selectable transmission power: high (10W) or low (5W)

- Frequency offset
- Shift repeater
- "Busy channel lock" function
- Output power level indicator on the display
- Roger beep
- TOT (Time Out Timer)
- Keypad lock
- Reset of functions/channels
- Low battery voice announcement
- Li-Ion 2800mAh battery pack
- Accessory socket: 2 pin Kenwood

PACKAGING AND CODES

Radio, **long and short antennas**, Li-Ion 2800mAh battery pack, belt clip, table charger, wrist strap, wall adapter.

code C1339

PROGRAMMING SOFTWARE PRG10 - C974.01

Complete with USB connection cable for PC.



AMATEUR VHF/UHF